



Lumped Element Coaxial SMA type Circulator

170 ~ 205 MHz

ADC018CSLH(35)-B

Features

- Low Insertion Loss at room temperature.
- Wide band characteristic
- High peak and average power capacity
- Robust design for shock and vibration
- RoHS Compliant


Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	170~205
Insertion Loss	dB Max.	1.0
Isolation	dB Min.	20
VSWR	Max.	1.20 : 1
Temperature	°C	0 ~ +60
REV Power	W Max.	100
Input/Output Impedance	Ω	50

Mechanical Dimensions

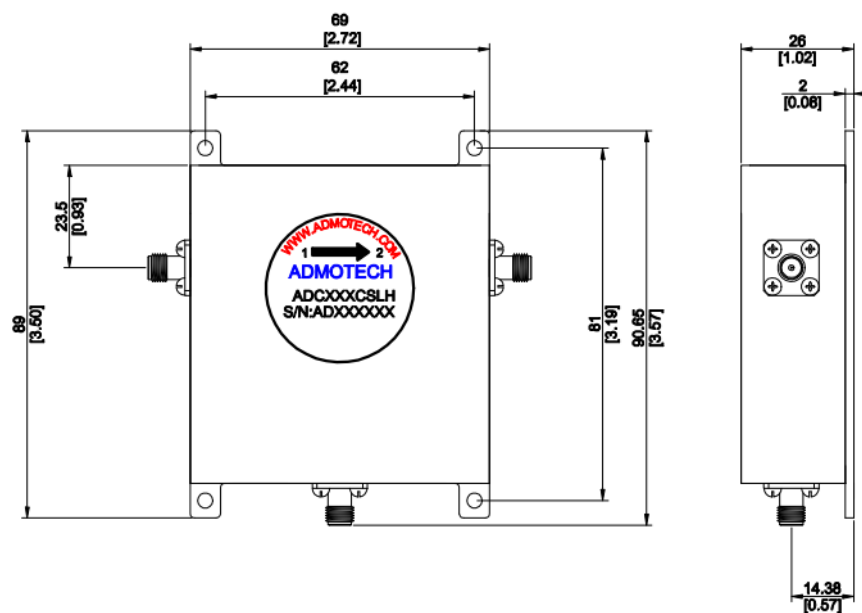

unit: mm[inch]
Tolerance: ± 0.2 mm

If you do not find appropriate frequency range, please contact with sales@admotech.com