



DROP-IN Circulator

420 ~ 470 MHz

ADC045GD(50)

Features

- 19dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	420 ~ 470
Insertion Loss	dB Max.	0.50
Isolation	dB Min.	16
VSWR	Max.	1.38 : 1
Temperature	°C	- 40 ~ +85
REV Power	W Max.	100
Input/Output Impedance	Ω	50

Mechanical Dimensions

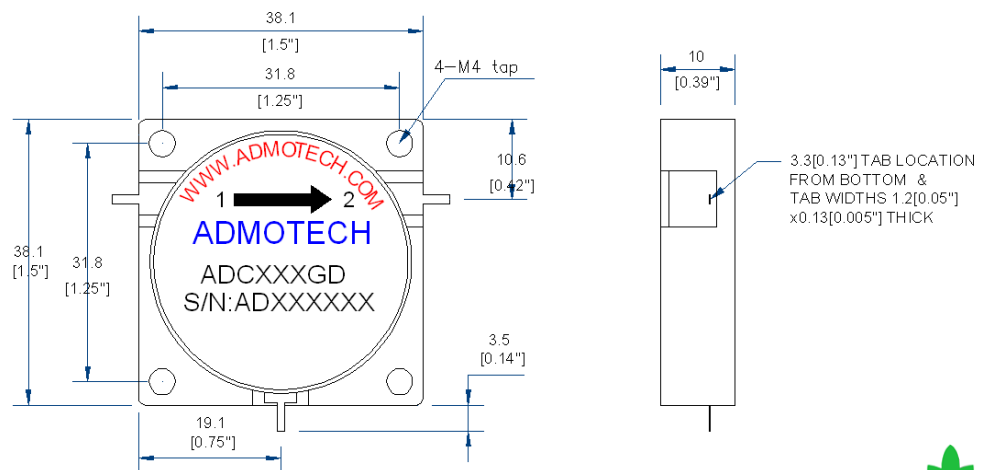

Package Size : GD
 Option Type : None
 Direction:Clockwise Default

Unit: mm[inch]



If you do not find appropriate frequency range, Please contact with sales@admotech.com