



DROP-IN Circulator

776 ~ 787 MHz

ADC078FD

Features

- 21dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	776 ~ 787
Insertion Loss	dB Max.	0.45
Isolation	dB Min.	19
VSWR	Max.	1.29 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	150/100
Input/Output Impedance	Ω	50

Mechanical Dimensions

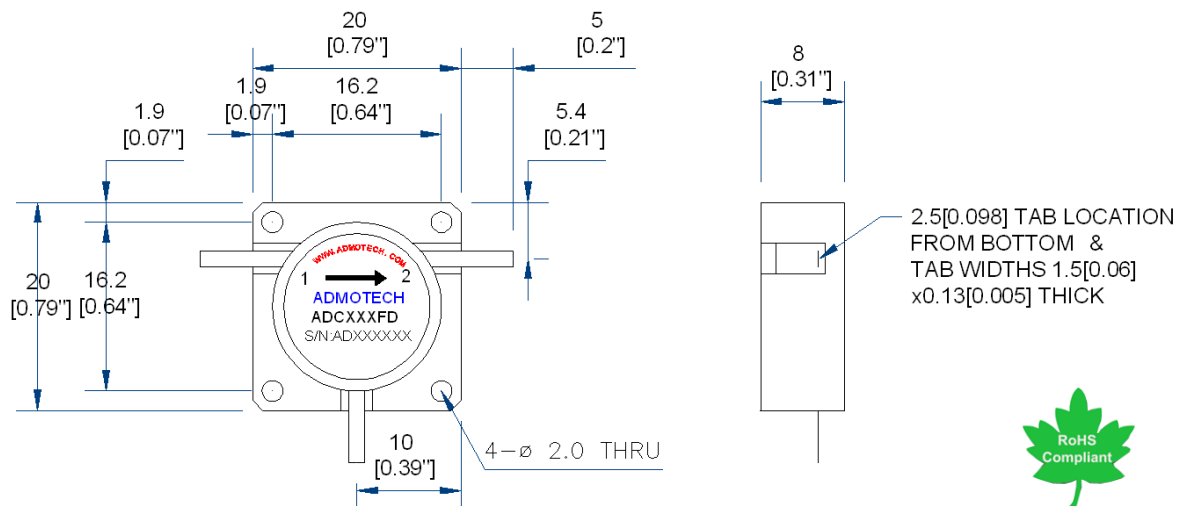

Unit: mm[inch]
Tolerance:±0.2mm

Package size : FD

Option Type : None

Direction:Clockwise Default

If you do not find appropriate frequency range, Please contact with sales@admotech.com