



4-Port Waveguide Circulator

12.15 ~ 12.25 GHz

ADC1220WRF90(100)



Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	12.15~12.25
Insertion Loss	dB Max.	0.4
Isolation	dB Min.	18
VSWR	Max.	1.28 : 1
Temperature	°C	- 30 ~ +75
Forward Power	W Max.	100
Waveguide Package	-	WR90

Mechanical Dimensions

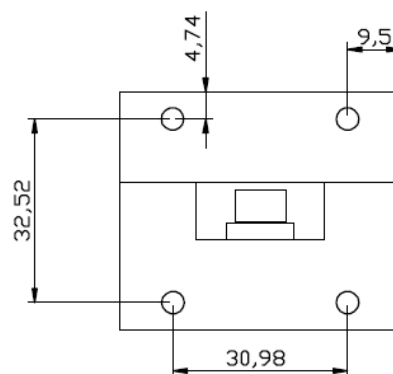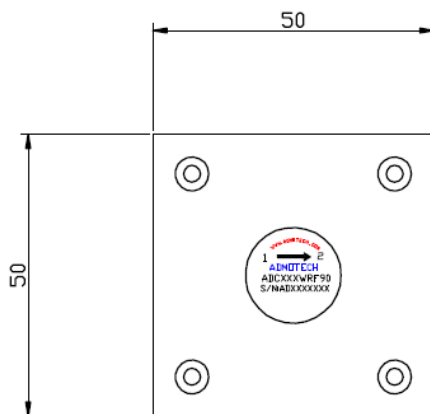

If you do not find appropriate frequency range, Please contact with sales@admotech.com