



# High Power Circulator 1500 MHz $\pm 5$ MHz

## ADC1500CE2K-W

### Features

- High peak and average power capacity
- Robust design for shock and vibration
- RoHS Compliant


### Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	1500 $\pm 5$
Insertion Loss (S21)	dB Max.	0.3 after tuning for power
Isolation (S12, S31)	dB Min.	19 before tuning
VSWR (S11, S22)	Max.	1.25 : 1 before tuning
Operating Temperature	$^{\circ}$ C	+15 ~ +30
FWD Power	W Max.	2500 (open, short @port2)
Input/Output Impedance	$\Omega$	50

### Mechanical Dimensions

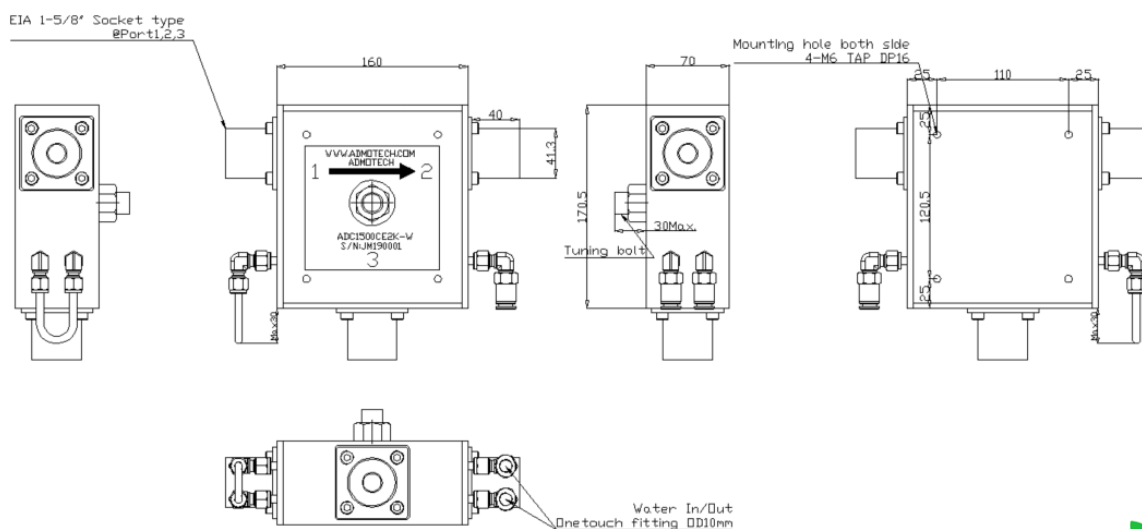

If you do not find appropriate frequency range, please contact with [sales@admotech.com](mailto:sales@admotech.com)