



# DROP-IN Circulator

## 8.0 ~ 10.0 GHz

### ADC900DD(2G)

### Features

- Designed for Military, Radar, ECT
- RoHS Compliant

### Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	8,000 ~ 10,000
Insertion Loss	dB Max.	0.6
Isolation	dB Min.	17
VSWR	Max.	1.33
Operating Temperature	°C	- 30 ~ +80
Power	CW Max.	50
Input/Output Impedance	Ω	50

### Mechanical Dimensions

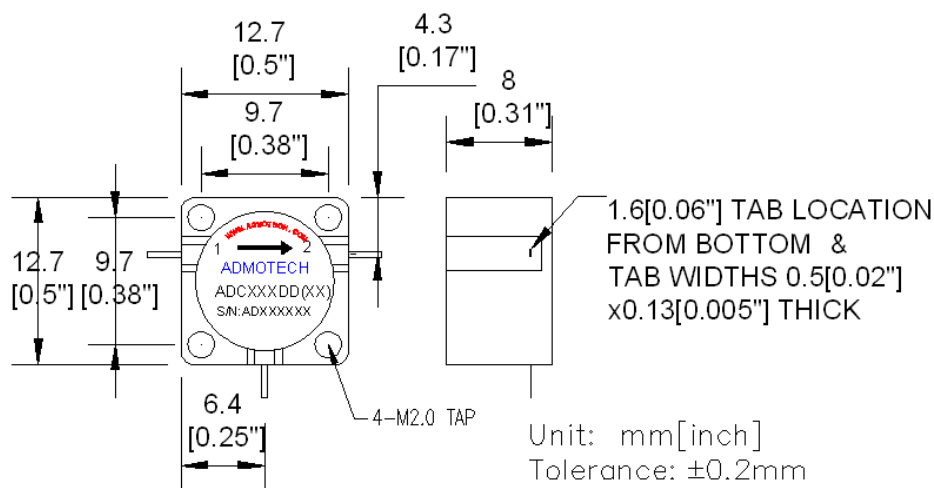

Package Size : DD  
Option Type : none



If you do not find appropriate frequency range, Please contact with sales@admotech.com