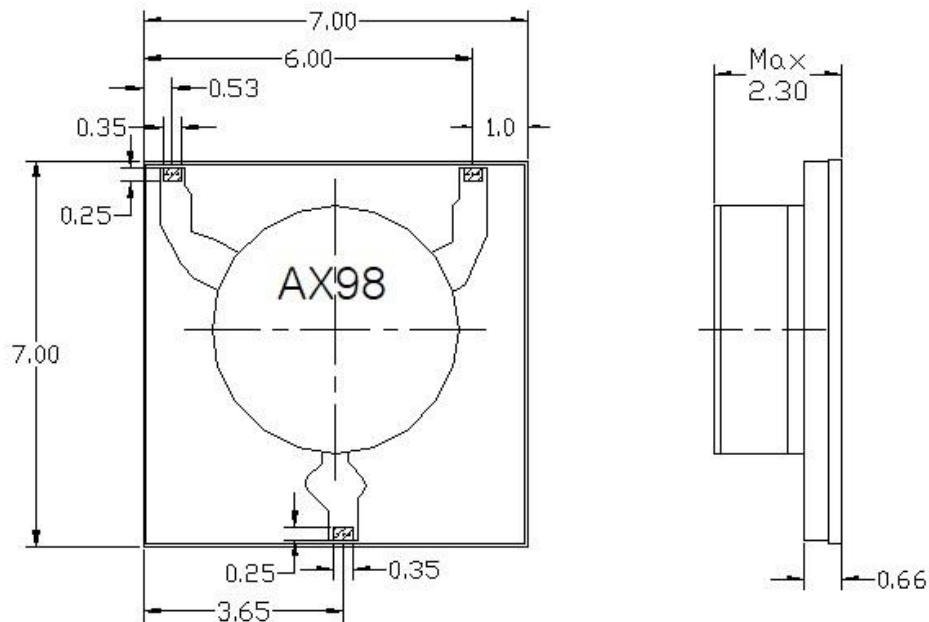


**X-BAND MICROSTRIP CIRULATOR****AX98****Features**

- Low Insertion Loss
- High Isolation
- Custom Design Available
- Lead Free

**Electrical Characteristics**

Parameter	Units	Specifications
Frequency	GHz	9.2 ~10.4
Insertion Loss	dB Max.	0.5dB
Return Loss	dB Min.	17.0dB
Isolation	dB Min.	17.0dB
Operating Temperature	°C	-40 ~ +85
Power FWD./REV.	W Max.	10
Direction		CW

**Dimensions**

NOTES:  
 3\*WIRE BONDABLE AREA   
 Assembly: +20°C~+125°C  
 Direction : Clockwise

[UNIT:MM]

[Tolerance: ±0.1MM]