



DROP-IN Isolator 2700 ~ 3100 MHz

ADI290CETL

Features

- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	2700 ~ 3100
Insertion Loss	dB Max.	0.4
Isolation	dB Min.	18
VSWR	Max.	1.33 : 1
Temperature	°C	- 40~ +85
Power(Fwd./Rev.)	W Max.	150/30
Input/Output Impedance	Ω	50

Mechanical Dimensions

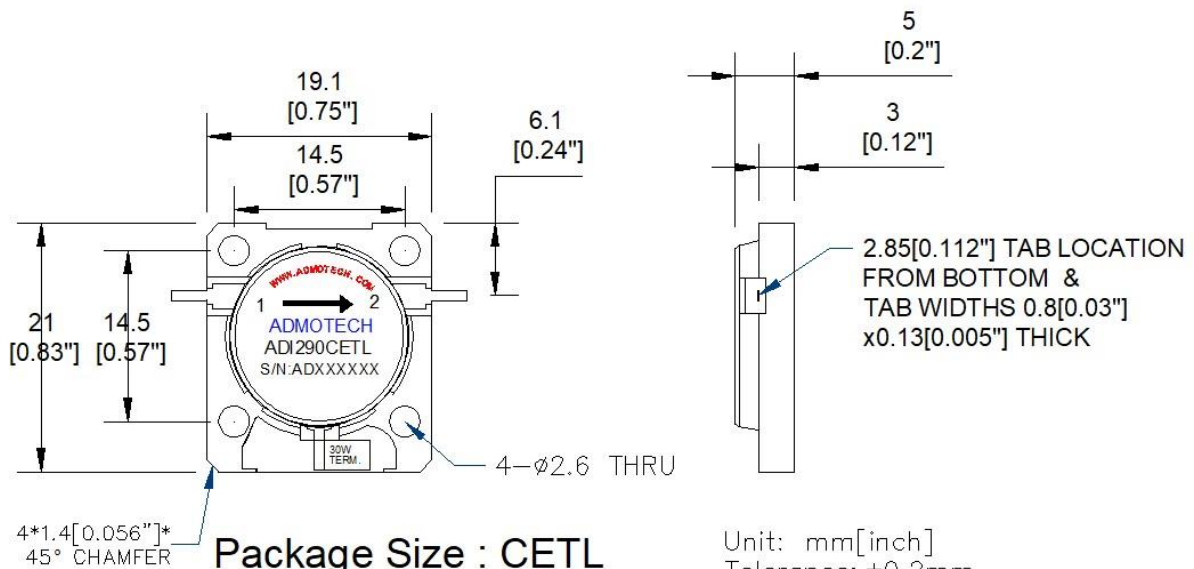

Package Size : CETL
Option Type : none
Direction: Clockwise Default

If you do not find appropriate frequency range, Please contact with sales@admotech.com