



# DROP-IN Isolator 5200 ~ 5900 MHz

## ADI555DDT(700)-100

### Features

- Custom products available with alternate configurations such reverse circulation etc.
- Designed for Military, Radar, etc.
- RoHS Compliant

### Options


The customers can choose as follows

- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	5200 ~ 5900
Insertion Loss	dB Max.	0.60
Isolation	dB Min.	16
VSWR	Max.	1.38: 1
Temperature	°C	- 20 ~ +85
Power	W Max.	800W Pulse Duty 10% 200us
Direction		Clockwise
Input/Output Impedance	Ω	50

### Mechanical Dimensions

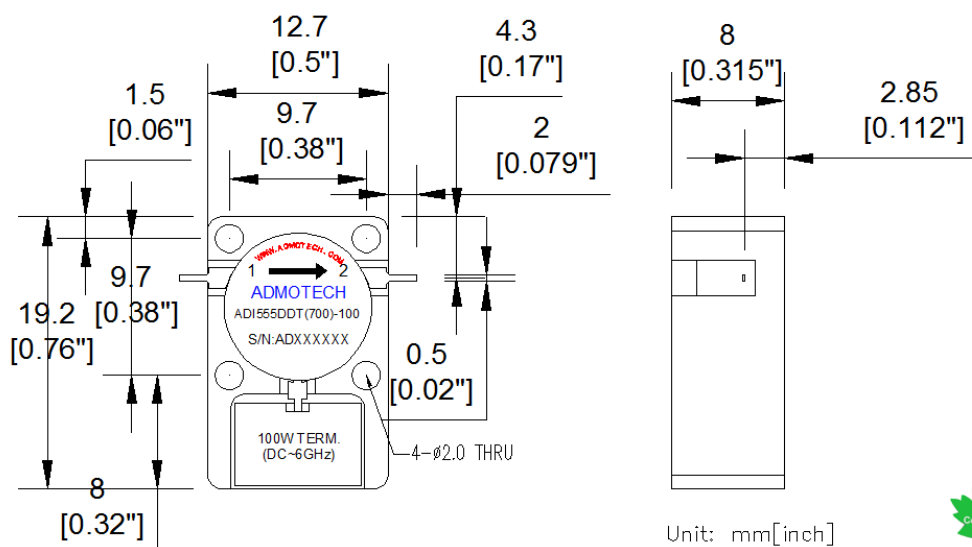

\*Tolerance is  $\pm 0.2$ mm otherwise specified

If you do not find appropriate frequency range, Please contact with [sales@admotech.com](mailto:sales@admotech.com)