



# Coaxial SMA Type Circulator

## 7000 ~ 14000 MHz

**ADC7014CSIH**

### Features

- 20dB typical Isolation, 0.70dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant

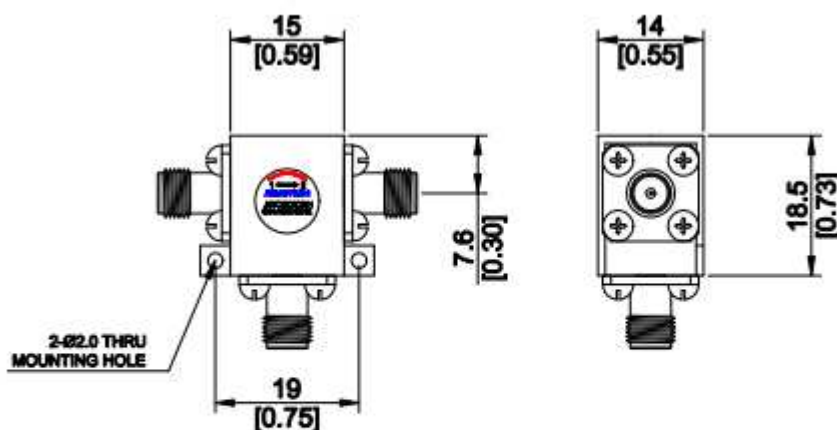
### Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	7000~14000
Insertion Loss	dB Max.	1.0
Isolation	dB Min.	17.0
VSWR	Max.	1.33 : 1
Temperature	°C	-20 ~ 85
FDW./REV. Power	W Max.	10/10
Input/Output Impedance	$\Omega$	50

### Mechanical Dimensions

**TOP VIEW****SIDE VIEW**unit: mm[inch]  
Tolerance: ±0.2mm