

**ADMOTEC**

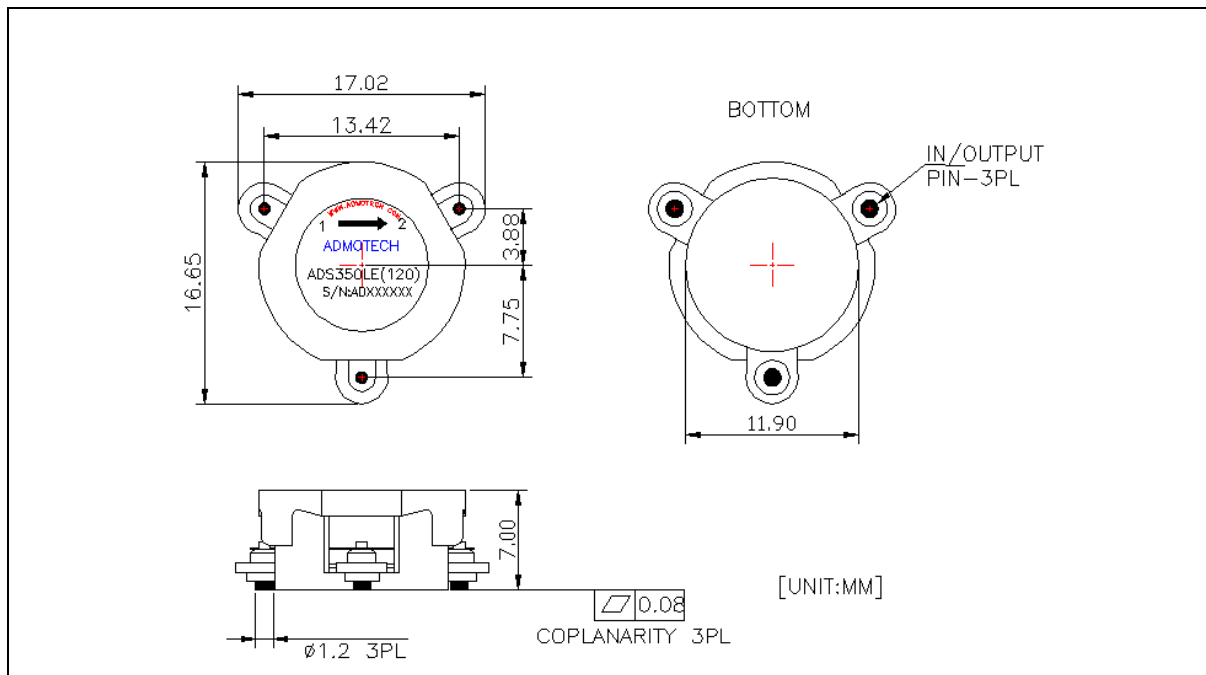
Advanced Mobile Technology

1320,Gwanpyoung-dong,Yoosung-Gu,Taejon,305-509, Korea
Tel :+82-42-936-1353 Fax :+82-42-936-1350**ADMOTEC 0.5INCH SMD CIRULATOR
3450~3550MH****ADS350LE-J****Features**

- Low Insertion Loss
- Custom Design Available
- ROHS Compliant
- High Isolation
- Standard Reflow Processing
- Lead Free

**Electrical Characteristics**

Parameter	Units	Specifications
Frequency	MHz	3450 ~3550
Insertion Loss	dB Max.	0.35dB
Return Loss	dB Min.	20dB
Isolation	dB Min.	20dB
IMD	50W/2tone	73dBc
Temperature	°C	- 40 ~ +85
Power Avg. / Peak	W Max.	60 / 500
Input/Output Impedance	Ω	50
Direction		CW

Mechanical Dimensions**If you do not find appropriate frequency range, please contact with sales@admotech.com**