



Waveguide X-band Circulator

9.5 ~ 10.0 GHz

ADC975WR90(500)

Features

- High peak and average power capacity
- Robust design for shock and vibration
- RoHS Compliant

Options

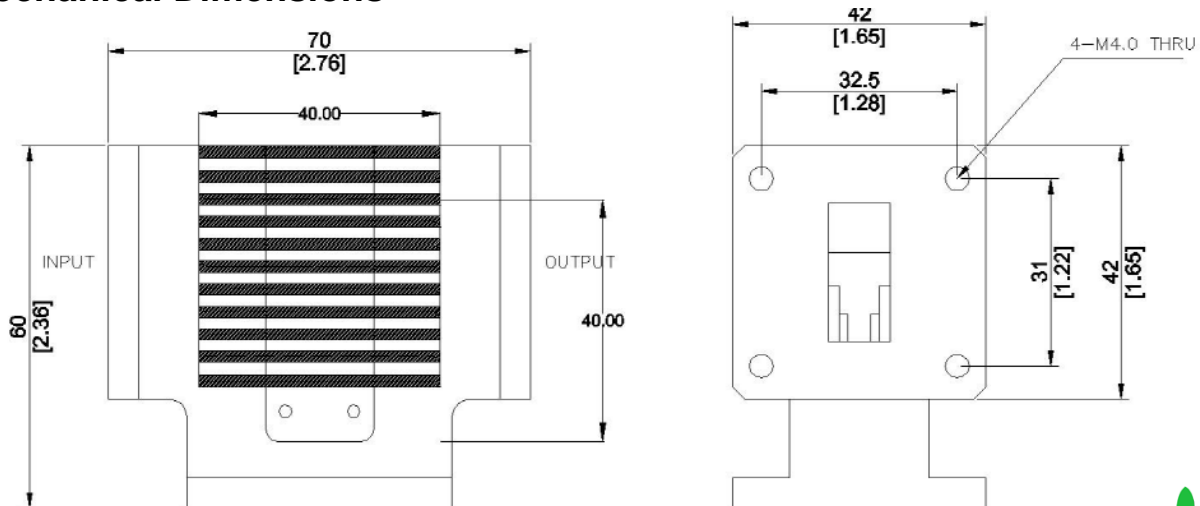
The customers can choose as follows

- Direction: Clockwise (Default) or Counter Clockwise.

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	9.5~10.0
Insertion Loss	dB Max.	0.3
Isolation	dB Min.	20
VSWR	Max.	1.25 : 1
Temperature	°C	-30 ~ 85
Forward Power	W Max.	700(Peak 5kW)
Waveguide Package	-	WR90

Mechanical Dimensions

**TOP VIEW****SIDE VIEW**

unit: mm[inch]
Tolerance: ±0.2mm

If you do not find appropriate frequency range, please contact with sales@admotech.com