



# Waveguide S-band Isolator 2.4~2.5 GHz

## ADI245WR340(100)


### Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	2.4~2.5
Insertion Loss	dB Max.	0.3
Isolation	dB Min.	20
VSWR	Max.	1.25 : 1
Temperature	°C	-30 ~ +85
FWD/REV Power	W Max.	CW 3000
Waveguide Package	-	WR340

### Mechanical Dimensions

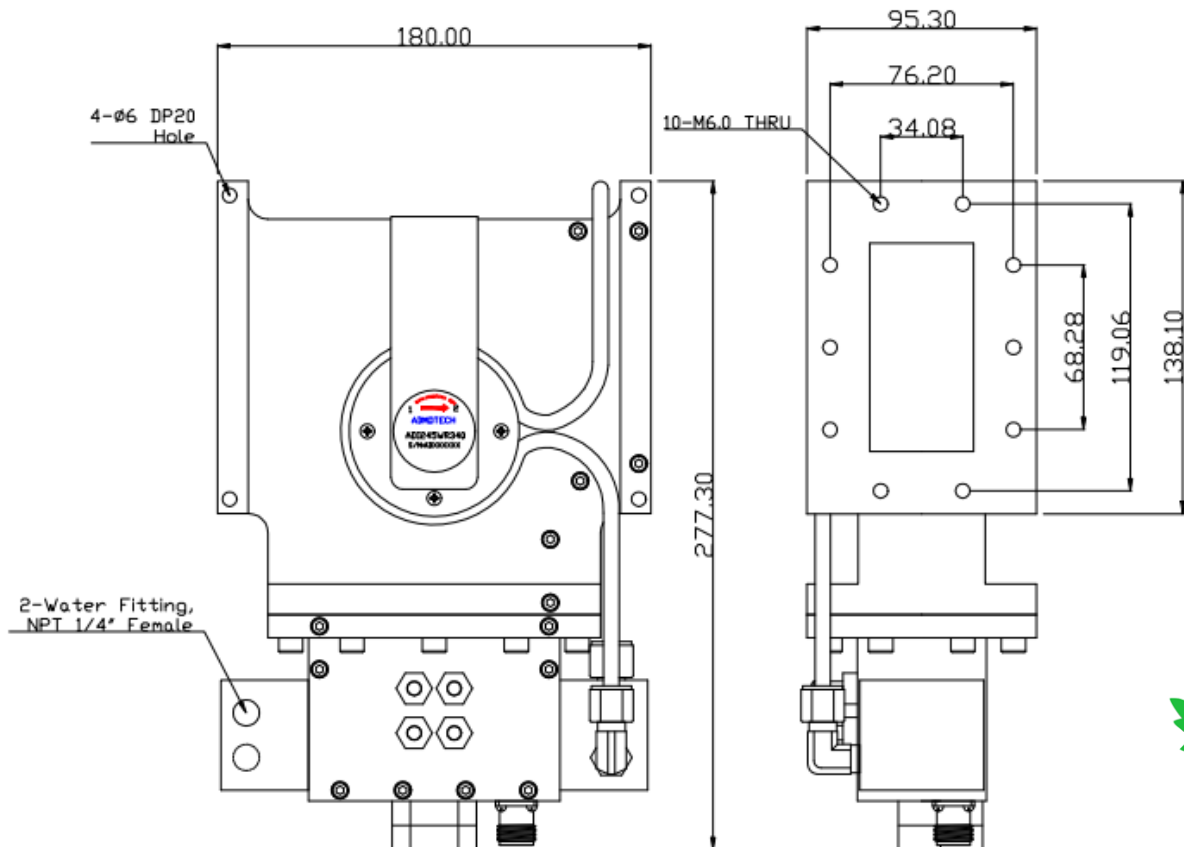

If you do not find appropriate frequency range, please contact with [sales@admotech.com](mailto:sales@admotech.com)