



## WR112 Waveguide to SMA adapter

### 7.05~10.0 GHz

### ADWA8525/2950-A



### Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	7.05~10.0
Insertion Loss	dB Max.	0.3
VSWR	Max.	1.25 : 1
POWER CW	-	50
Material	-	Aluminum
Connector type	-	SMA-Female
Waveguide type	-	WR112

### Mechanical Dimensions

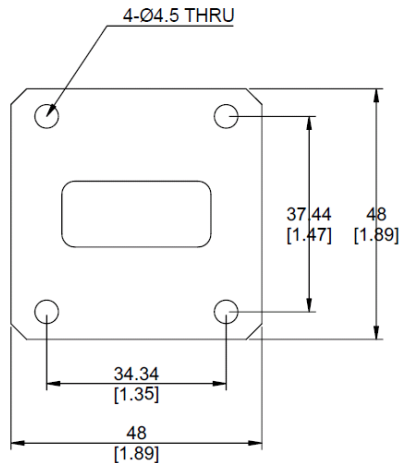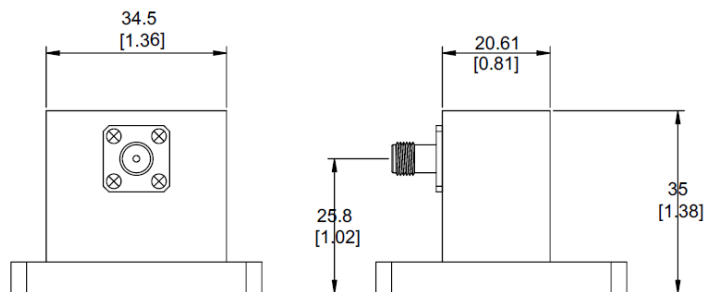

If you do not find appropriate frequency range, please contact with [sales@admotech.com](mailto:sales@admotech.com)