



WR137 Waveguide to SMA adapter

5.85~8.20 GHz

ADWA7025/2350-A



Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	5.85~8.20
Insertion Loss	dB Max.	0.25
VSWR	Max.	1.25 : 1
POWER CW	-	50
Material	-	Aluminum
Connector type	-	SMA-Female
Waveguide type	-	WR137

Mechanical Dimensions

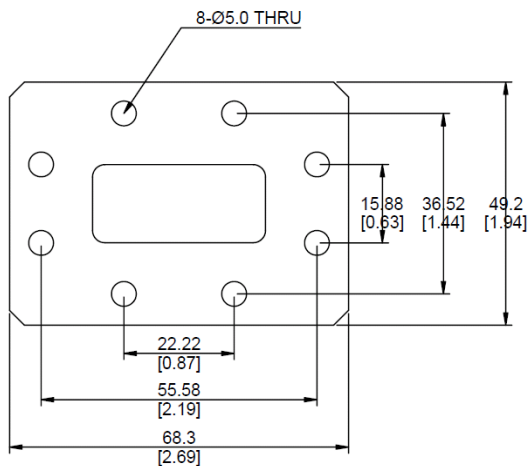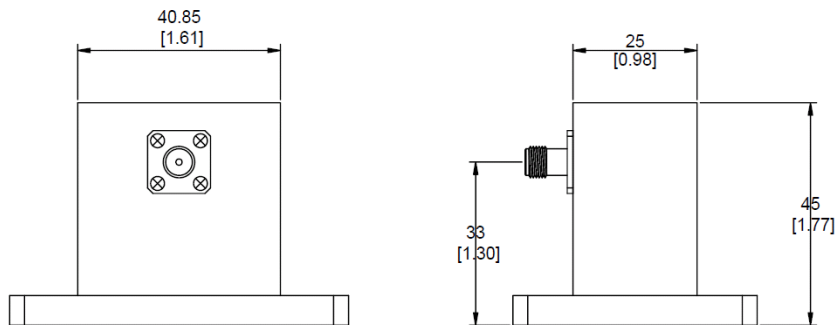

If you do not find appropriate frequency range, please contact with sales@admotech.com