



# Coaxial SMA Type Isolator 700 ~ 1000 MHz

## ADI085CSDH(300)



### Features

- 12dB typical Isolation, 0.95dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	700 ~ 1000
Insertion Loss	dB Max.	1.2
Isolation	dB Min.	10
VSWR	Max.	2.10 : 1
Temperature	°C	- 30 ~ +85
FDW./REV. Power	W Max.	150/100
Input/Output Impedance	Ω	50

### Mechanical Dimensions

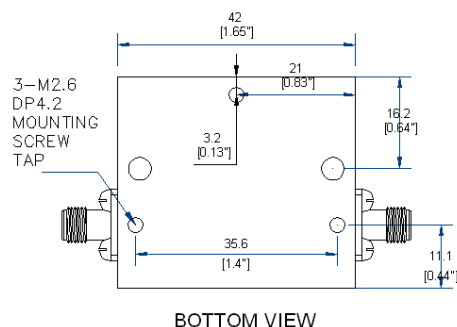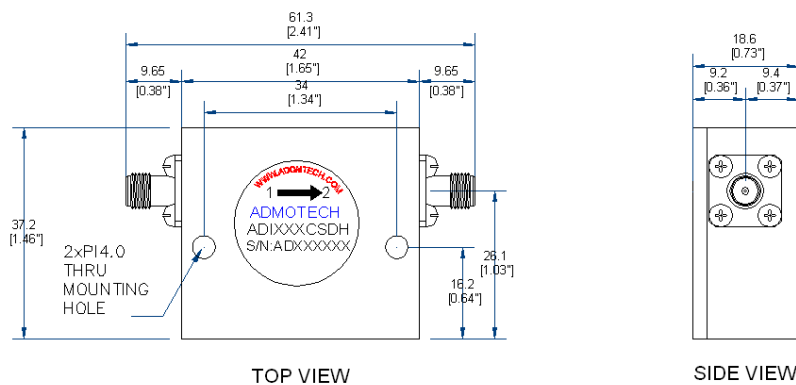

Unit:mm[inch]  
Tolerance : ±0.2mm

If you do not find appropriate frequency range, Please contact with sales@admotech.com