ADMOTECH
Advanced Mobile Technology

1320,Gwanpyoung-dong,Yoosung-Gu,Taejon,305-509, Korea
Tel :+82-42-936-1353 Fax :+82-42-936-1350

Coaxial SMA Type Isolator
2700 ~ 2900MHz ADI280CSPH

Features

- 22dB typical Isolation, 0.3dB typical Insertion Loss at room temperature.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	2700 ~ 2900
Insertion Loss	dB Max.	0.45
Isolation	dB Min.	19
VSWR	Max.	1.3 : 1
Temperature	°C	- 30 ~ +85
FWD/REV Power	W Max.	150/100
Input/Output Impedance	Ω	50

Mechanical Dimensions

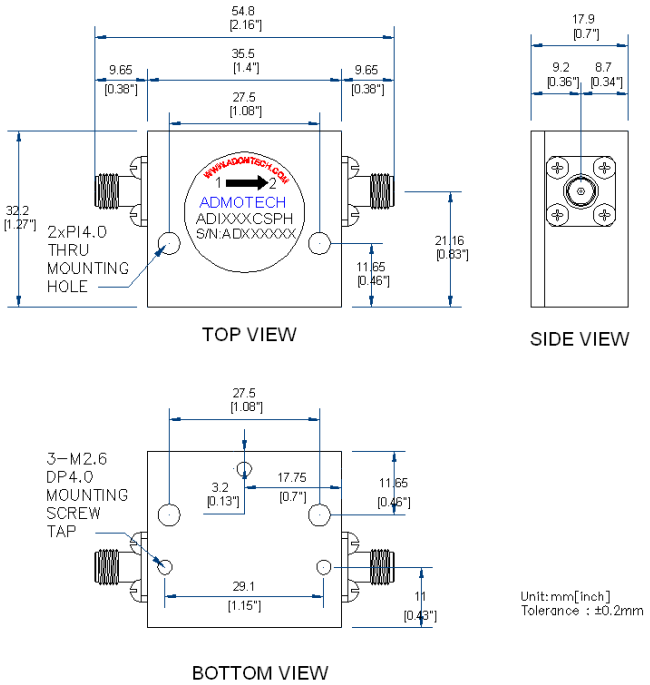

RoHS Compliant

If you do not find appropriate frequency range, Please contact with sales@admotech.com