



# Coaxial SMA Type Isolator 3450 ~ 3900MHz

## ADI367CSPH


### Features

- 20dB typical Isolation, 0.35dB typical Insertion Loss at room temperature.
- Designed for Wireless Telecommunications Systems.
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	3450 ~ 3900
Insertion Loss	dB Max.	0.40
Isolation	dB Min.	17
VSWR	Max.	1.37 : 1
Temperature	°C	- 20 ~ +80
FWD/REV Power	W Max.	100
Input/Output Impedance	Ω	50

### Mechanical Dimensions

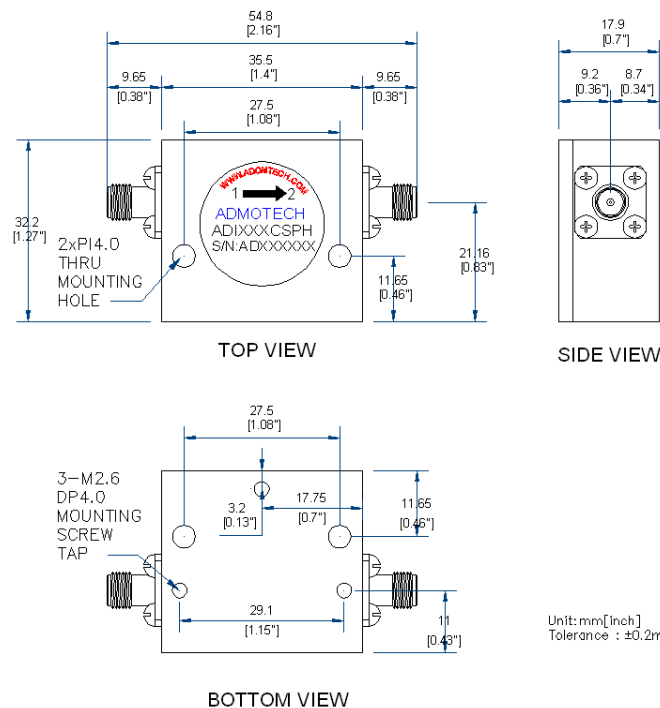

If you do not find appropriate frequency range, Please contact with sales@admotech.com