



Coaxial SMA Type Isolator 3400 ~ 4900 MHz

ADI415CSIH

Features

- 24dB typical Isolation, 0.3dB typical Insertion Loss at room temperature.
- Wide band characteristic.
- Robust design for shock and vibration.
- RoHS Compliant

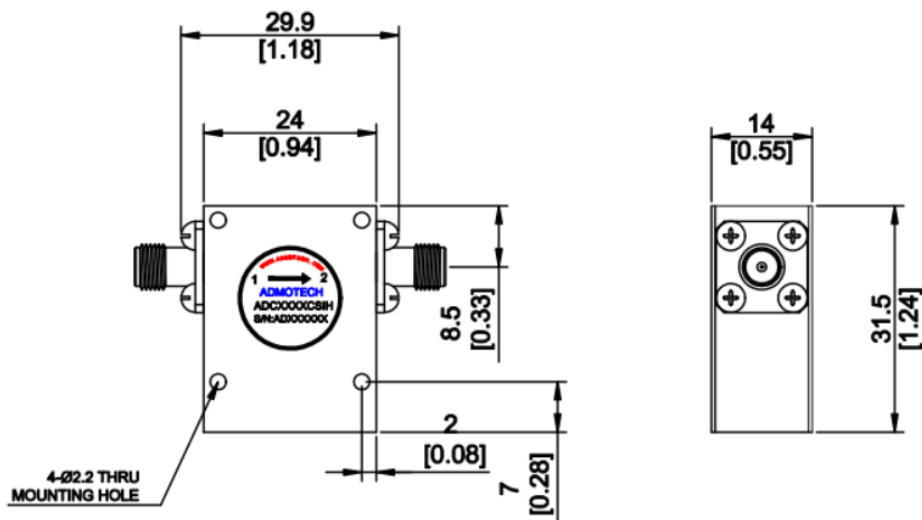
Options

- The customers can choose as follows
- Direction : Clockwise(Default) or Counter Clockwise.

Electrical Characteristics

| Parameter | Units | Specifications |
|------------------------|---------|----------------|
| Frequency | MHz | 3400~4900 |
| Insertion Loss | dB Max. | 0.5 |
| Isolation | dB Min. | 20 |
| VSWR | Max. | 1.25 : 1 |
| Temperature | °C | -30 ~ 85 |
| FDW./REV. Power | W Max. | 50/50 |
| Input/Output Impedance | Ω | 50 |

Mechanical Dimensions

**TOP VIEW****SIDE VIEW**

unit: mm[inch]
Tolerance: ±0.2mm



If you do not find appropriate frequency range, please contact with sales@admotech.com