



# Coaxial SMA Type Isolator 5200 ~ 5900 MHz

## ADI555CSKH


### Features

- 18dB typical Isolation, 0.65dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant


### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	5200 ~ 5900
Insertion Loss	dB Max.	0.85
Isolation	dB Min.	16
VSWR	Max.	1.38 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	60/50
Input/Output Impedance	Ω	50

### Mechanical Dimensions

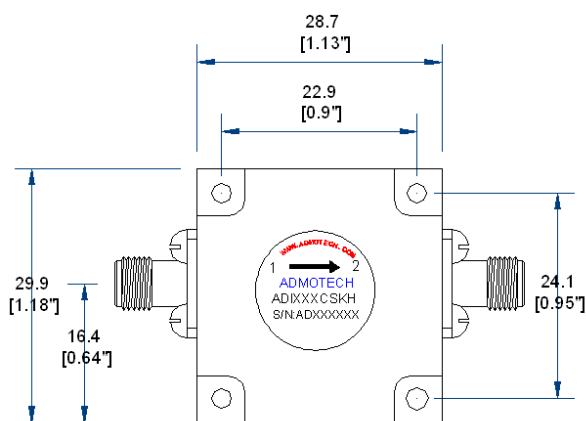

TOP VIEW

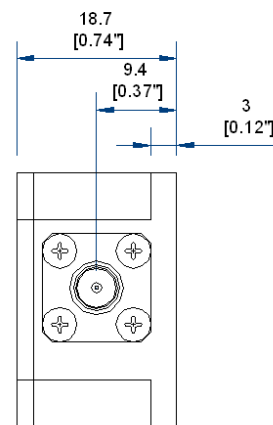

SIDE VIEW

Unit: mm[inch]  
Tolerance: ±0.2mm