

**ADMOTEC**

Advanced Mobile Technology

1320,Gwanpyoung-dong,Yoosung-Gu,Taejon,305-509, Korea  
Tel :+82-42-936-1353 Fax :+82-42-936-1350

# DROP-IN ISOLATOR 5700~5850 MHz

## ADI578DDT(150)

### Options


The customers can choose ad followers

- Direction : Clockwise(Default) or Counter Clockwise.

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	5700 ~5850
Insertion Loss	dB Min.	0.4dB(room) 0.6dB(max.)
Return Loss	dB Max.	19dB(room), 17dB(Max)
Isolation	dB Max.	19dB(room), 17dB(Max)
Temperature	°C	- 20 ~+85
Power REV.	W Max.	50
Input/Output Impedance	Ω	50

### Mechanical Dimensions

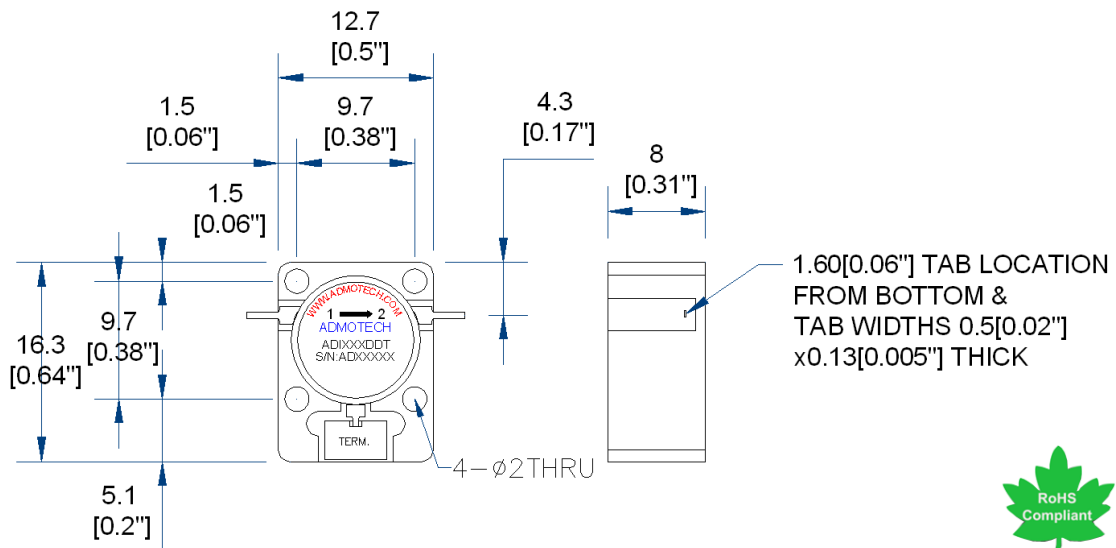

Package Size : DD

Unit: mm[inch]

Option Type : T

Tolerance: ±0.2mm

Direction:Clockwise Default

If you do not find appropriate frequency range, Please contact with sales@admotech.com