



Features


- Ceramic Band Pass Filter (1,164 MHz ~ 1,216 MHz)
- Typical 1.4 dB Insertion Loss
- CW 2W Power Handling



Specifications

Parameter	Specifications	Remarks
Frequency Range	1,164 ~ 1,216 MHz	BW : 52 MHz
Center Frequency	1,190 MHz	
Insertion Loss (Max.)	2.0 dB	
Pass Band Ripple (Max.)	1.0 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	50 dB @ 1,091 MHz	
	50 dB @ 1,291 MHz	
Group Delay (Max.)	20 nSec	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operation Temperature Range	-40 °C ~ +85 °C	

Outline drawing

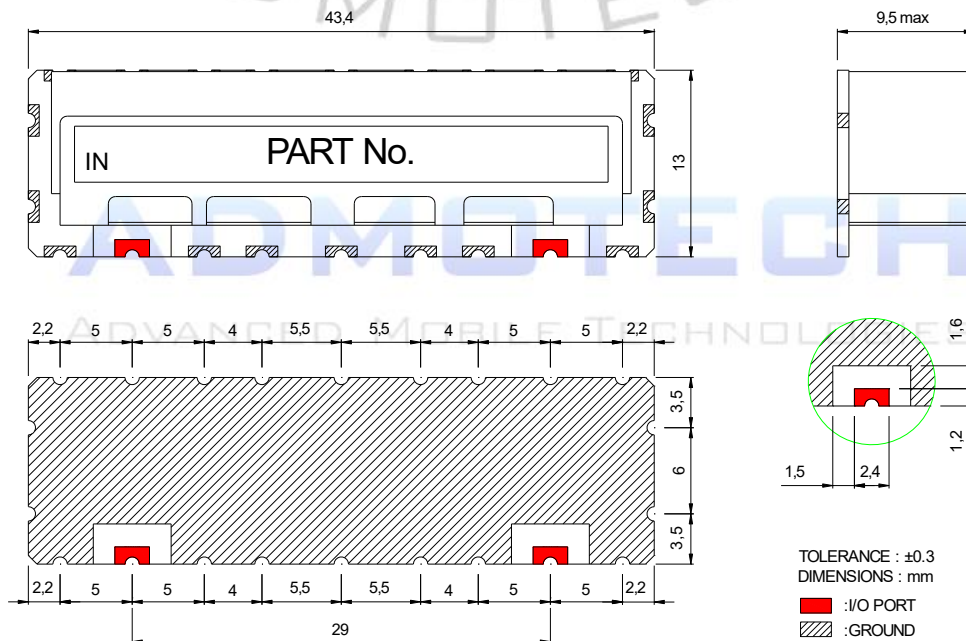

Typical Response

