

Features


- Cavity Band Pass Filter (1,890 MHz ~ 1,910 MHz)
- Very compact size and low weight
- Typical 2.5 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	1,890 ~ 1,910 MHz	BW : 20 MHz
Center Frequency	1,900 MHz	
Insertion Loss (Max.)	3.0 dB	
Pass Band Ripple (Max.)	1.0 dB	
V. S. W. R (Max.)	1.3 : 1	
Rejection (Min.)	80 dB @ 1,760 MHz	
	80 dB @ 2,040 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 1 W	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	12.7 * 60.96 * 26.67 mm	Excluding Connectors
Connector	SMA (Female)	
Weight	50 g Max.	

Outline drawing

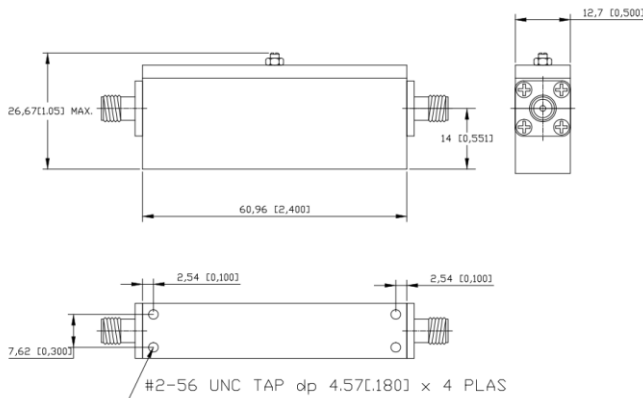

Typical Response

