

Features


- Ceramic Band Pass Filter (2,200 MHz ~ 2,300 MHz)
- Typical 1.8 dB Insertion Loss
- CW 3W Power Handling



Specifications

Parameter	Specifications	Remarks
Frequency Range	2,200 ~ 2,300 MHz	BW : 100 MHz
Center Frequency	2,250 MHz	
Insertion Loss (Max.)	2.2 dB	
Return Loss (Min.)	14.0 dB	
Rejection (Min.)	60 dB @ 2,100 MHz	
	60 dB @ 2,400 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 3 W	
Operation Temperature Range	-20 °C ~ +60 °C	

Outline drawing

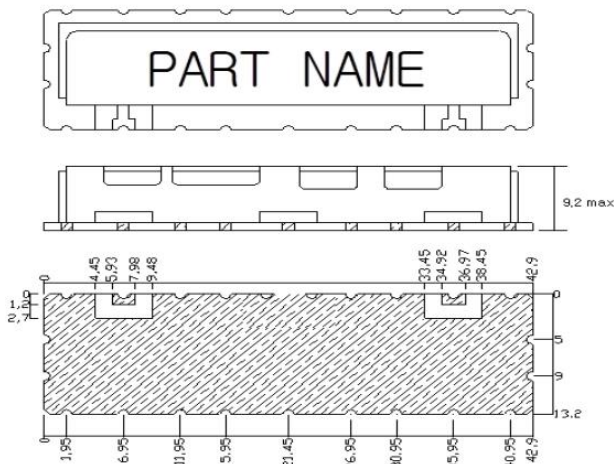

Units : mm, Tolerance : +/- 0.3 mm

Typical Response

