

Features


- Cavity Band Pass Filter (2,320 MHz ~ 2,340 MHz)
- Very compact size and low weight
- Typical 0.7 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	2,320 ~ 2,340 MHz	BW : 20 MHz
Center Frequency	2,330 MHz	
Insertion Loss (Max.)	1.5 dB	
Pass Band Ripple (Max.)	0.5 dB	
Return Loss (Min.)	18.0 dB	
Rejection (Min.)	100 dBc @ 2,220 ~ 2,240 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 100 W	
Operation Temperature Range	-20 °C ~ +85 °C	
Dimensions	100 * 50 * 27 mm	Exclude Connectors
Connector	SMA (Female)	

Outline drawing

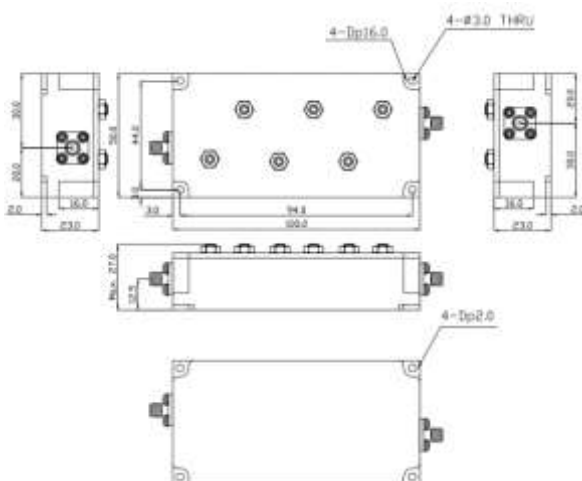

Units : mm, Tolerance : +/- 0.2 mm

Typical Response

