

Features


- ADLPF 2250/100-S composed of Low Pass Filter.
- Compact size and low weight
- Typical 0.4 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	2,200 ~ 2,300 MHz	BW : 100 MHz
Insertion Loss (Max.)	0.5 dB	
Pass Band Ripple (Max.)	0.1 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	45 dBc @ 4,500 MHz	
	45 dBc @ 6,750 MHz	
	40 dBc @ 9,000 MHz	
	30 dBc @ 11,250 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 50 W	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	25 * 15 * 5 mm	
Connector	SMD	

Outline drawing

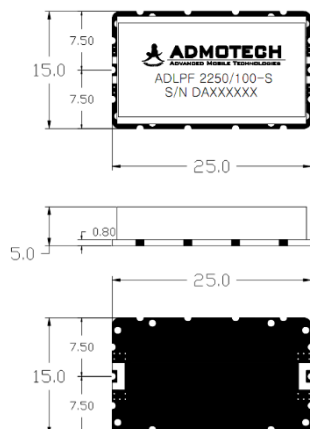

Typical Response

