



Features


- Ku Band Cavity Band Pass Filter.
- Very compact size and low weight
- Typical 2.0 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	14,902.5 MHz ~ 14,980.5 MHz	BW : 78 MHz
Center Frequency	14,941.5 MHz	
Insertion Loss (Max.)	2.5 dB	
Pass Band Ripple (Max.)	1.0 dB	
Return Loss (Min.)	18.0 dB	
Rejection (Min.)	65 dB @ 15,070.5 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 10 W	
Operating Temperature	-45 °C ~ +85 °C	
Dimensions	61 * 25 * 15 mm	Excluding Connectors
Connector	SMA (Female)	

Outline drawing

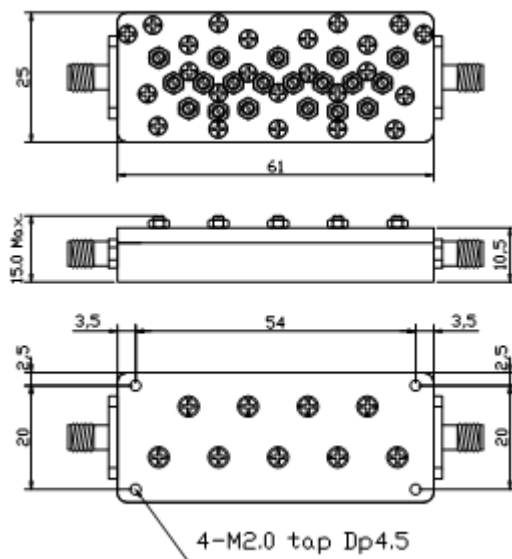

Typical Response

