


### Features


- Ceramic Band Pass Filter (2,790 MHz ~ 2,910 MHz)
- Typical 2.9 dB Insertion Loss
- CW 2W Power Handling

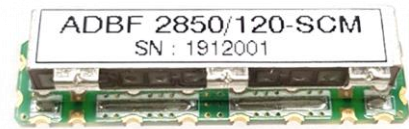

### Specifications

Parameter	Specifications	Remarks
Frequency Range	2,790~ 2,910 MHz	BW : 120 MHz
Center Frequency	2,850 MHz	
Insertion Loss (Max.)	4.0 dB	
Return Loss (Min.)	15.0 dB	
Rejection (Min.)	60 dB @ 2,725 MHz	
	60 dB @ 2,975 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operation Temperature Range	-54°C ~ +105 °C	

### Outline drawing

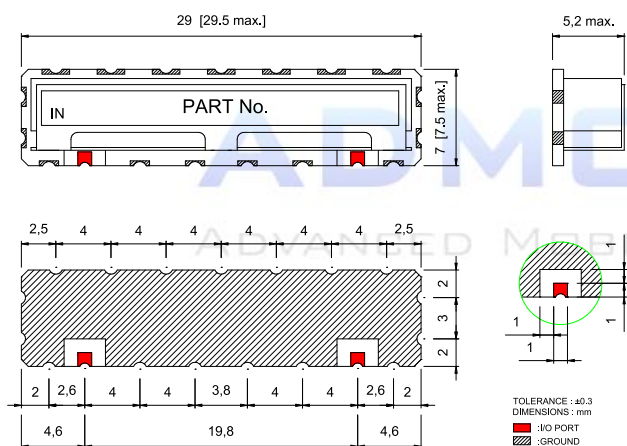

Units : mm, Tolerance : +/- 0.3 mm

### Typical Response

