

### Features


- Ceramic Band Pass Filter (3,100 MHz ~ 3,300 MHz)
- Typical 1.3 dB Insertion Loss
- CW 3W Power Handling



### Specifications

Parameter	Specifications	Remarks
Frequency Range	3,100~ 3,300 MHz	BW : 200 MHz
Center Frequency	3,200 MHz	
Insertion Loss (Max.)	3.0 dB	
Return Loss (Min.)	14.0 dB	
Rejection (Min.)	55 dB @ 2,700 MHz	
	50 dB @ 3,500 MHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 3 W	
Operation Temperature Range	-32 °C ~ +85 °C	

### Outline drawing

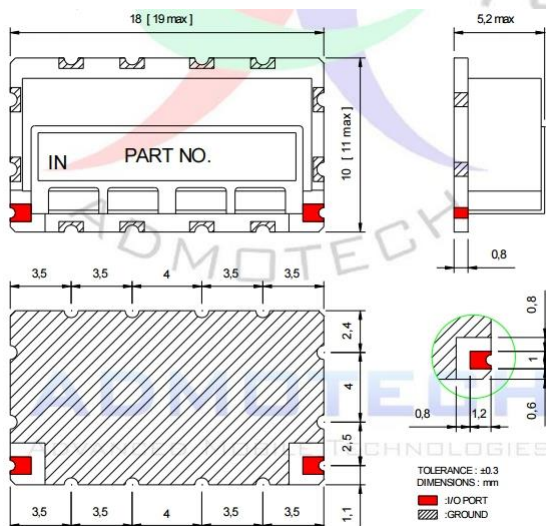

Units : mm, Tolerance : +/- 0.3 mm

### Typical Response

