



### Features


- Ceramic Band Pass Filter (3,310 MHz ~ 3,390 MHz)
- Typical 2.6 dB Insertion Loss
- CW 2 W Power Handling



### Specifications

Parameter	Specifications	Remarks
Frequency Range	3,310~ 3,390 MHz	BW : 80 MHz
Center Frequency	3,350 MHz	
Insertion Loss (Max.)	4.0 dB	
Return Loss (Min.)	14.0 dB	
Rejection (Min.)	40 dB @ $F_o \pm 100$ MHz	
	25 dB @ 4,500 MHz	
In/ Out Impedance	50 $\Omega$	
Handling Power (Max.)	CW 2 W	
Operation Temperature Range	-54°C ~ +105 °C	

### Outline drawing

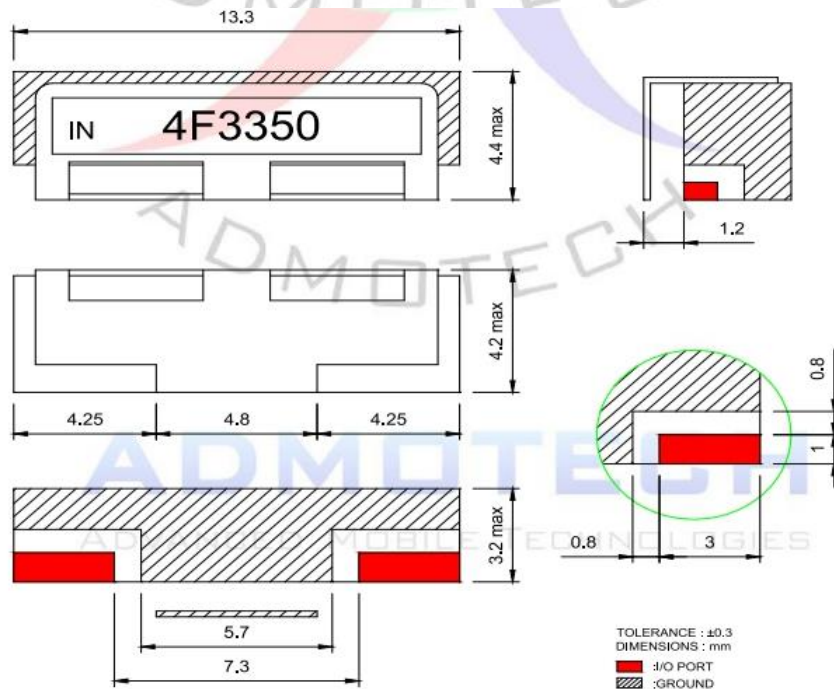

## Typical Response

