

### Features


- Pin Type Cavity Filter (7,125 MHz ~ 7,750 MHz)
- Very compact size and low weight
- Typical 0.6 dB Insertion Loss



### Specifications

Parameter	Specifications	Remarks
Frequency Range	7,125 ~ 7,750 MHz	BW : 625 MHz
Center Frequency	7,437.5 MHz	
Insertion Loss (Max.)	1.0 dB	
Pass Band Ripple (Max.)	0.5 dB	
Return Loss (Min.)	18.0 dB	
Rejection (Min.)	65 dBc @ Fc ± 1757.5 MHz	
	65 dBc @ Fc ± 7437.5 MHz	
In/Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	60 * 16 * 15 mm	Excluding Connectors
Connector	Pin Type	

### Outline drawing

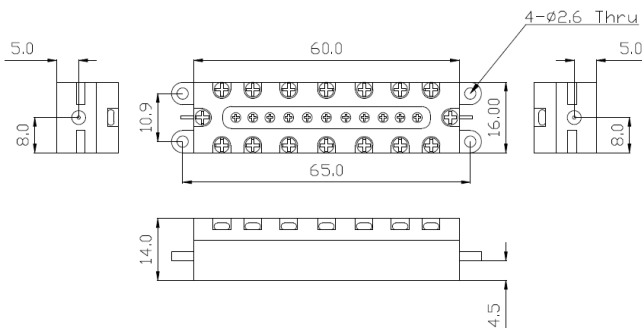

### Typical Response

