

Features


- Narrowband Filter (9,385 MHz ~ 9,415 MHz)
- Very compact size and low weight
- Typical 1.5 dB Insertion Loss



Specifications

Parameter	Specifications	Remarks
Frequency Range	9,385 ~ 9,415 MHz	BW : 30 MHz
Center Frequency	9,400 MHz	
Insertion Loss (Max.)	2.0 dB	
Pass Band Ripple (Max.)	0.5 dB	
Return Loss (Min.)	18.0 dB	
Rejection (Min.)	55 dBc @ Fc ± 200 MHz	
	60 dBc @ 11.0 ~ 21.0 GHz	
In/ Out Impedance	50 Ω	
Handling Power (Max.)	CW 2 W	
Operating Temperature	-40 °C ~ +85 °C	
Dimensions	28 * 25 * 15 mm	Excluding Connectors
Connector	SMA (Female)	

Outline drawing

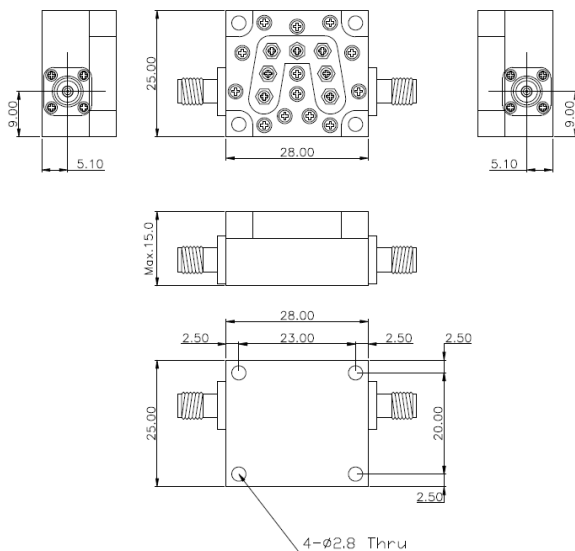

Typical Response

