

Features


- LTE Band 25 uplink BAND STOP FILTER
- Typical 2.5 dB Insertion Loss
- Typical 55.0 dB Stop Band Attenuation



Specifications

Parameter	Specifications	Remarks
Pass Band Frequency Range	DC ~ 1,750 MHz, 1,920 ~ 4,000 MHz	
Insertion Loss (Max.)	3.0 dB @ Pass Band	
Stop Band Attenuation (Min.)	50 dB @ 1,850 ~ 1,915 MHz	LTE Band 25 UL
Return Loss (Min.)	12 dB @ Pass Band	
In/ Out Impedance	50 Ω	
Dimensions	211.0 * 99.0 * 43.0 mm	Exclude Connectors
Connector	SMA (F)	

Outline drawing

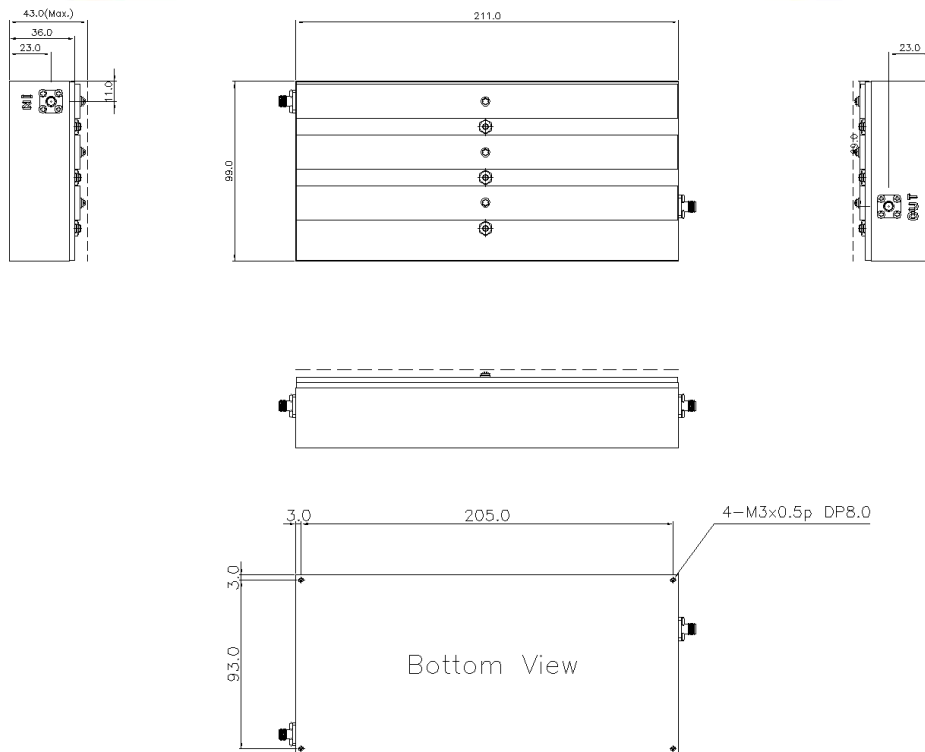

Units : mm, Tolerance : +/- 0.2 mm

Typical Response

