

Features


- LTE Band 7 uplink BAND STOP FILTER
- Typical 2.0 dB Insertion Loss
- Typical 61.0 dB Stop Band Attenuation



Specifications

Parameter	Specifications	Remarks
Pass Band Frequency Range	DC ~ 2,490 MHz, 2,580 ~ 4,000 MHz	
Insertion Loss (Max.)	2.5 dB @ Pass Band	
Stop Band Attenuation (Min.)	60 dB @ 2,500 ~ 2,570 MHz	LTE Band 7 UL
Return Loss (Min.)	12 dB @ Pass Band	
In/ Out Impedance	50 Ω	
Dimensions	101.0 * 121.0 * 37.0 mm	Exclude Connectors
Connector	SMA (F)	

Outline drawing

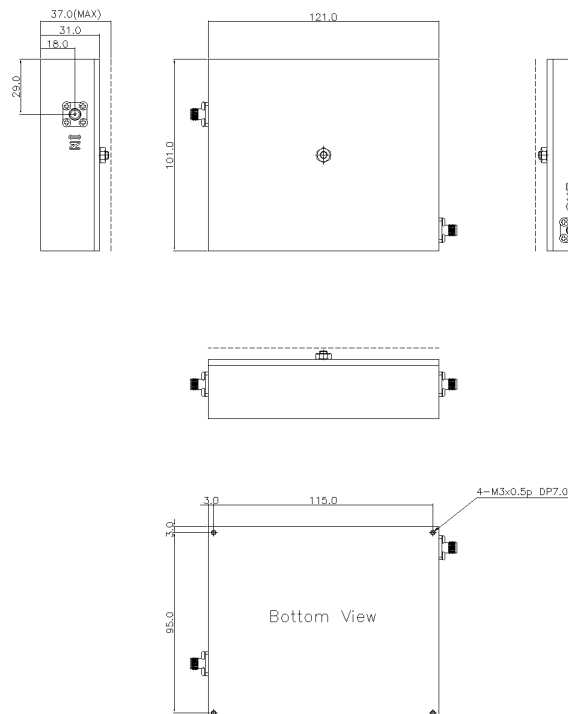

Units : mm, Tolerance : +/- 0.2 mm

Typical Response

