



# Coaxial SMA Type Circulator

## 8750 ~ 9250 MHz

# ADC900CSYH


### Features

- 19dB typical Isolation, 0.45dB typical Insertion Loss at room temperature.
- Custom products available with alternate configurations such as attenuators, high power terminations, reverse circulation etc.
- Designed for Military, Radar, ECT
- RoHS Compliant

### Electrical Characteristics

Parameter	Units	Specifications
Frequency	MHz	8750 ~ 9250
Insertion Loss	dB Max.	0.65
Isolation	dB Min.	17
VSWR	Max.	1.38 : 1
Temperature	°C	- 20 ~ +85
FDW./REV. Power	W Max.	30/20
Input/Output Impedance	Ω	50

### Mechanical Dimensions

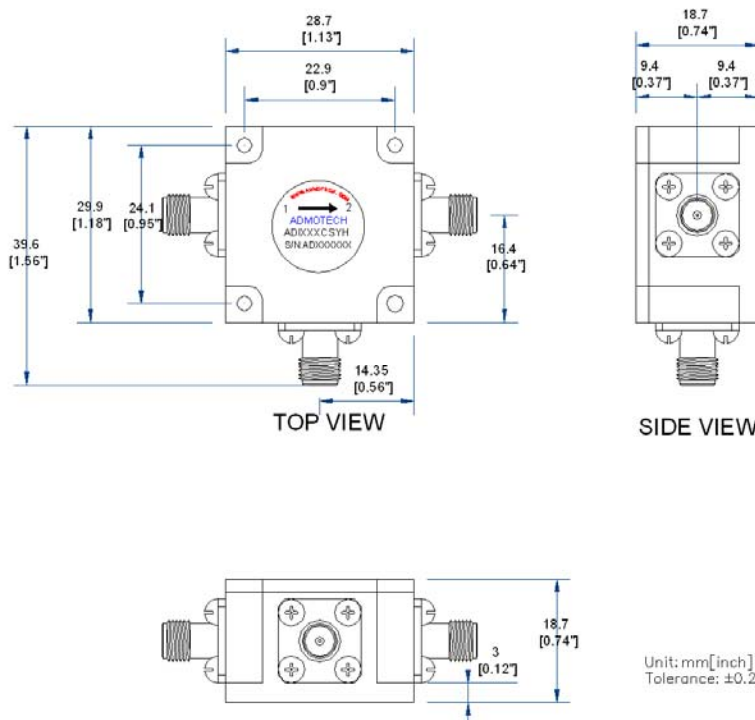

If you do not find appropriate frequency range, Please contact with sales@admotech.com